

## INT2-L Strain Gauge Digital Indicator

### Key Features:

- 6-Digit LED Display ( $\pm 199999$ )
- Input: up to 40mV/V
- Environmental Protection: IP65 (when installed)
- 10Vdc Load Cell Excitation @ 120mA max.
- Powers up to 4 x 350ohm Load Cells
- Options: Alarm Relays, Analogue & Digital Outputs
- Customisation of Software
- Portable Desktop Enclosure
- Ideal Replacement for Druck DPI 280 & 281 Indicators
- Simple, Menu Free Operation
- Compatible with any Strain Gauge Based Transducers
- Robust Construction
- Panel Mounted, 1/8 DIN Size
- Front Face Sealed to IP65
- 3 Year Warranty

**This product has been discontinued.**

Please use [Strain Gauge Digital Indicator | Panel Meter | Intuitive4-L](#)



The INT2-L meter's main function is to display physical variables, such as weight, load, force and torque. It provides you with a 10V regulated excitation supply, capable of powering up to four 350 Ohm loadcells. This can be used in 4 wire or 6 wire installations. You can linearise signals with the 10 point user configurable lineariser, which is a standard feature on the INT2-L indicator.

The INT2-L is easy to configure with no complex menu system. The readout is provided by a 6-digit LED display coupled with an ultra-high resolution 20-bit A/D converter and highly stable strain gauge bridge excitation source which provides superb resolution and stability in any application. The front panel has a 7 segment window for displaying the measurement allowing decimal point and minus sign characters to be included and has 4 alarm annunciators to show the status of each alarm relay

Peak and valley memories allow you to view the maximum and minimum recorded measurements. Also, the meter can give alarm outputs, scaled and isolated analogue output and isolated serial data retransmission, when fitted with option boards.

A lockout switch on the rear of the meter saves your configuration settings in non-volatile memory, which has a 10 year guaranteed storage period. When the lockout switch is set to ON, your settings cannot be accidentally altered.

Our 3-year warranty applies to the Intuitive2-L and to any of our extensive range of transducers supplied with it, please [contact our sales team](#).

### Options:

- 95-265VAC or 11-30VDC Supply
- Analogue Outputs
- RS232 or RS485
- 2x or 4x Mechanical Alarm Relays (rated 5A @ 250Vac), 2x SPCO Relays or Dual Solid State Relays.

## Industries:

- Automotive
- Agriculture
- Silo and Weighing Industry
- Construction
- Alternative Energy
- Civil Engineering
- Lifting and Handling
- Waste Management


## Applications:

- Weighing Platforms
- Vessel Weighing Systems
- Weighbridges
- Conveyor Weighing Systems
- Bridge Structure Monitoring
- Waste Management Systems
- Lifting and Handling
- Monitoring of Anchor Loads
- Truck Load Weight Monitoring
- Skip Weighing System
- Multi-Cell or Multi-Transducer Installations
- Monitoring of Building Foundations
- Force Measurement in Formula Racing
- Silo Weighing
- Measuring the Power Output of a Motor
- Vessel Weighing Systems

## Specification:

| CHARACTERISTICS               | INTUITIVE2-L  | UNITS                           |
|-------------------------------|---|---------------------------------|
| Display                       | 6 digit, 7 segment LED, 14mm high (-199999 to +199999)  |                                 |
| Resolution                    | 1:400,000 max. (bipolar)  |                                 |
| Display Update Rate:          | 10/second   |                                 |
| Accuracy                      | <±0.05  | % of range of mV input          |
| Bridge Excitation             | 10.0±0.1% (option: 5.0±0.1%)  | Volts dc                        |
| Maximum Excitation Current    | 120.0   | mA                              |
| Input Range                   | 0.5-3 (options: 5, 10, 30, 100 or 500)  | mV/V for max. display reading   |
| Input Impedance               | >10   | Megaohms                        |
| Digital Filtering             | 0 to 5 (adjustable)   | Seconds effective time constant |
| Display Count By              | 1, 2, 5, 10, 20, 50 digits (selectable)   |                                 |
| Analogue Output (Optional)    | ±10Vdc, 0-10Vdc or 4-20mA   |                                 |
| Operating Temperature         | 0 to +50  | °C                              |
| Thermal Drift                 | Span = 25, Zero = 30  | ppm/°C                          |
| Operating Voltage             | 95-265VAC (11-30VDC optional)   |                                 |
| Environmental Protection      | IP65 (IP67 optional)  |                                 |
| Weight                        | 300   | Grams                           |
| Panel Cutout                  | 1/8 DIN (92mm x 45mm + I/-0)  |                                 |
| Features                      | Tare facility, peak & valley detection, 10-point linearisation, 1 program memory (8 optional) |                                 |
| Trip Outputs (optional)       | 2x or 4x relays rated 5A @ 250Vac, 2x SPCO or 2x solid state                                  |                                 |
| Serial Data Output (optional) | RS232 / RS485   |                                 |
|                               | Please consult sales regarding option requirements  |                                 |

## Dimensions (mm):

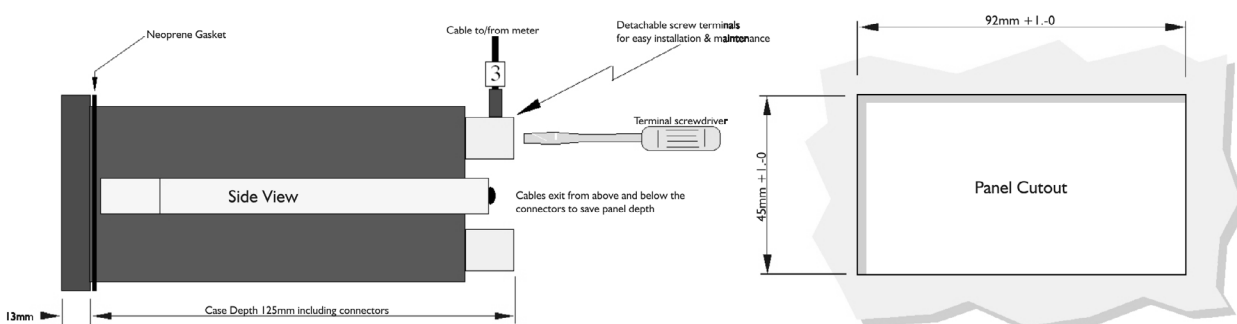


## Ordering Codes:

| <b>INT2-L-ANI-AL2-0-R-AC-MEM</b>  | <b>INT2</b> | <b>-</b> | <b>L</b> | <b>-</b> | <b>ANI</b> | <b>-</b> | <b>AL2</b> | <b>-</b> | <b>0</b> | <b>-</b> | <b>R</b> | <b>-</b> | <b>AC</b> | <b>-</b> | <b>MEM</b> |
|---|-------------|----------|----------|----------|------------|----------|------------|----------|----------|----------|----------|----------|-----------|----------|------------|
| <b>Product Family</b>   |             |          |          |          |            |          |            |          |          |          |          |          |           |          |            |
| INT2  | INT2        |          |          |          |            |          |            |          |          |          |          |          |           |          |            |
| <b>Input Version</b>  |             |          |          |          |            |          |            |          |          |          |          |          |           |          |            |
| L = Load Cell Input   |             |          | L        |          |            |          |            |          |          |          |          |          |           |          |            |
| P = Process Input   |             |          | P        |          |            |          |            |          |          |          |          |          |           |          |            |
| C = Rate/Speed Input  |             |          | C        |          |            |          |            |          |          |          |          |          |           |          |            |
| <b>Analogue Output</b>  |             |          |          |          |            |          |            |          |          |          |          |          |           |          |            |
| 0 = None Fitted   |             |          |          |          | 0          |          |            |          |          |          |          |          |           |          |            |
| ANI = 4-20mA  |             |          |          |          | ANI        |          |            |          |          |          |          |          |           |          |            |
| ANV = 0-10Vdc (uni-polar)   |             |          |          |          | ANV        |          |            |          |          |          |          |          |           |          |            |
| ANB = ±10Vdc (bi-polar)   |             |          |          |          | ANB        |          |            |          |          |          |          |          |           |          |            |
| <b>Alarm Relays</b>   |             |          |          |          |            |          |            |          |          |          |          |          |           |          |            |
| 0 = None Fitted   |             |          |          |          |            |          | 0          |          |          |          |          |          |           |          |            |
| AL2 = 2 x Alarm Relays  |             |          |          |          |            |          | AL2        |          |          |          |          |          |           |          |            |
| AL4 = 4 x Alarm Relays  |             |          |          |          |            |          | AL4        |          |          |          |          |          |           |          |            |
| SPCO = 2 x SPCO Relays  |             |          |          |          |            |          | SPCO       |          |          |          |          |          |           |          |            |
| DSS = 2 x Solid State Relays  |             |          |          |          |            |          | DSS        |          |          |          |          |          |           |          |            |
| <b>Serial Data Output</b>   |             |          |          |          |            |          |            |          |          |          |          |          |           |          |            |
| 0 = None Fitted   |             |          |          |          |            |          |            |          | 0        |          |          |          |           |          |            |
| 232 = RS232   |             |          |          |          |            |          |            |          | 232      |          |          |          |           |          |            |
| 485 = RS485   |             |          |          |          |            |          |            |          | 485      |          |          |          |           |          |            |
| EN = Ethernet   |             |          |          |          |            |          |            |          | EN       |          |          |          |           |          |            |
| PDP = Profibus DP   |             |          |          |          |            |          |            |          | PDP      |          |          |          |           |          |            |
| <b>Display Colour</b>   |             |          |          |          |            |          |            |          |          |          |          |          |           |          |            |
| R = Red   |             |          |          |          |            |          |            |          |          |          | R        |          |           |          |            |
| G = Green   |             |          |          |          |            |          |            |          |          |          | G        |          |           |          |            |
| RDLV = Red for Daylight Viewing   |             |          |          |          |            |          |            |          |          |          | RDLV     |          |           |          |            |
| B = Blue  |             |          |          |          |            |          |            |          |          |          | B        |          |           |          |            |
| Y = Yellow  |             |          |          |          |            |          |            |          |          |          | Y        |          |           |          |            |
| W = White   |             |          |          |          |            |          |            |          |          |          | W        |          |           |          |            |
| <b>Supply Voltage</b>   |             |          |          |          |            |          |            |          |          |          |          |          |           |          |            |
| AC = 95-265Vac Universal Mains Supply                                       |             |          |          |          |            |          |            |          |          |          |          |          | AC        |          |            |
| DC = 11-30Vdc   |             |          |          |          |            |          |            |          |          |          |          |          | DC        |          |            |
| <b>Additional &amp; Special Features</b>                                    |             |          |          |          |            |          |            |          |          |          |          |          |           |          |            |
| Blank = None  |             |          |          |          |            |          |            |          |          |          |          |          |           |          | Blank      |
| MEM = 8 Calibration Memory (8 different load cells) - Requires 8-way Switch |             |          |          |          |            |          |            |          |          |          |          |          |           |          | MEM        |
| 100X = Fast Version with 100 Updates/Second                                 |             |          |          |          |            |          |            |          |          |          |          |          |           |          | 100X       |
| PL = Plain Front Cover (no buttons)   |             |          |          |          |            |          |            |          |          |          |          |          |           |          | PL         |
| SPC4 = IP67 Front Panel Cover   |             |          |          |          |            |          |            |          |          |          |          |          |           |          | SPC4       |
| Other special features will be determined by sales.                         |             |          |          |          |            |          |            |          |          |          |          |          |           |          |            |

## Accessories:

### SPC4: IP67 Splash-Proof Cover:

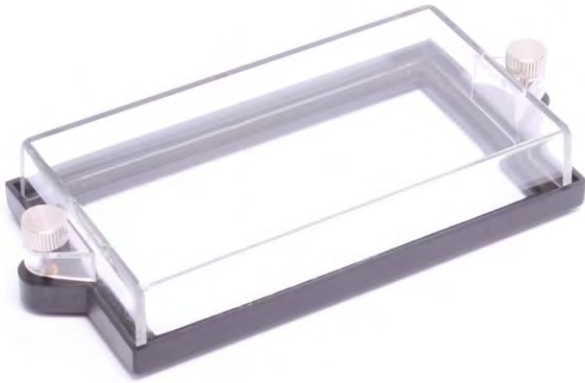


- Fits All Intuitive2 and Intuitive4 Indicators
- Low Cost
- Easy to Install
- Immersion Protected up to 1 metre
- Impact Resistant
- Fits Most 1/8 DIN Meters
- Non-Ferrous Parts for Longer Life
- Anti-Scratch Coating
- 3 Year Warranty

The SPC4 offers a low cost and robust method of sealing the front of all Intuitive2 and Intuitive4 indicators, along with most other manufacturers' 1/8 DIN size panel meters. The design uses all corrosion-resistant materials for longer life, meaning less maintenance. You can easily fit it to existing installations, or include it as a value-added accessory for new systems.

The panel cutout is the standard hole size for the panel meter, so no changes to the panel are needed. The front window is detachable, permitting adjustments to be made to the panel meter during commissioning and is held firmly in place by two knurled captive screws which resist accidental side or front impact.

The window and the holding frame are both moulded from a high impact resistant material. And, to give good reliability, the female threaded sections are made from marine brass and are moulded deep into the frame itself. Highly flexible and resilient neoprene gaskets firmly bonded to the inner and outer faces of the frame provide the reliable sealing effect, while for excellent clarity and resistance to scratching the covers are coated with a special anti-suff treatment.

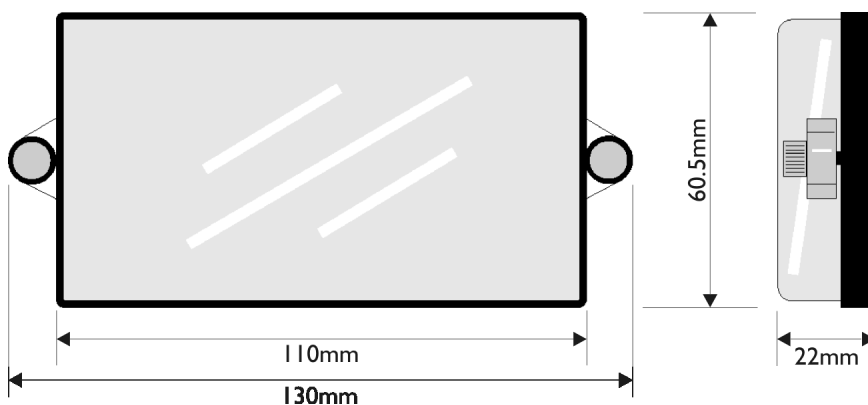

#### **Construction Materials:**

Window & Frame = Polycarbonate  
Screws = Nickel Plated Marine Brass  
Female Threaded Bushes = Marine Brass

**PCC: Portable Desktop Enclosure:**



- Fits All Intuitive4 Indicators
- Portable
- Fused IEC Power Input
- Robust Construction
- Supply Fully-Wired and Ready to use
- Attractive Styling
- 3 Year Warranty

The PCC range of portable desktop instrument cases are designed specifically to suit our Intuitive4 and Intuitive2 range of digital indicators and are available in a range of formats for housing anything from single meter to suit simple measuring systems up to a bank of 12 meters for multiple-sensors in industrial process monitoring applications. Specially designed cases for greater numbers of meters can be offered if required - please contact sales to discuss your application in detail.

All cases are fitted with a fused IEC mains input and a single sensor connection per indicator as standard, while reset buttons, lights, alarm sounders, rotary selection switches and integral battery power/backup are just some of the options that can be added to suit your specific requirements.

|  |              |                                      |
|--|--------------|--------------------------------------|
|  | Model: PCC1  | Dimensions: W200mm x H65mm x D185mm  |
|  | Model: PCC2  | Dimensions: W300mm x H65mm x D185mm  |
|  | Model: PCC4  | Dimensions: W300mm x H145mm x D220mm |
|  | Model: PCC6  | Dimensions: W510mm x H145mm x D220mm |
|  | Model: PCC12 | Dimensions: W685mm x H240mm x D280mm |

**Associated Products:**



[Strain Gauge Displacement Sensor AML/SGD](#)



[IL4-L Low Cost Strain Gauge Digital Indicator](#)



[PCC Portable Desktop Enclosure](#)